


\* Part is flexible and will stretch or tighten down approx. 5% of ID size.

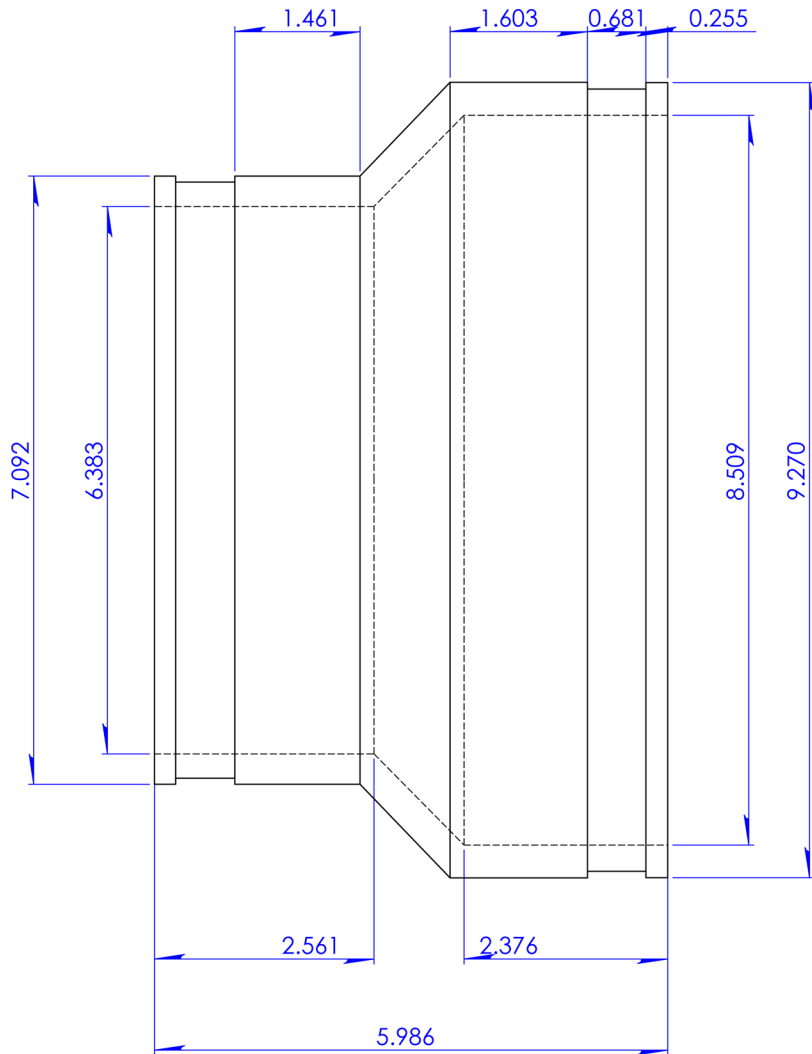

NOTES:  
 -SOME HIDDEN LINES NOT SHOWN  
 -BREAK ALL SHARP CORNERS  
 -REPORT ALL CHANGES TO ENGINEERING

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

|                     |                   |
|---------------------|-------------------|
| Part Weight         |                   |
| Min/Max Temp.       | -30/140 Degrees F |
| Pressure Tested     | 4.3 PSI           |
| Material            | Flexible PVC      |
| Installation Torque | 60" Lbs.          |
| Conforms to ASTM    | D5926, C1173      |
| Box Quantity        | 40                |
| Clamps used         | 300 Series        |

**TOLERANCES:**  
 .X= Fractional ±  
 .XX= ±.02  
 .XXX= ±.030  
 ANG.= ±0.5°  
 UNLESS OTHERWISE SPECIFIED

|        |          |
|--------|----------|
| UNITS: | SIZE     |
| INCHES | <b>A</b> |

3RD ANGLE PROJECTION  
 DO NOT SCALE DRAWING

|   |              |
|---|--------------|
| DESCRIPTION:                                      |              |
| Coupling 8" C. I. /Plastic x 6" Cast Iron/Plastic |              |
| 1056-86   |              |
| DESIGNER:   | SCALE        |
| D. Brady  | not to scale |
| CHECKER:  | DATE:        |
|   | 8/26/2008    |
| SHEET 1 OF 1                                      |              |